


Palete





- Palete od visokomolekularnog polietilena
- Prvi Liv garantovan i potvrđen
- Otporne na vremenske uslove
- Otporne na infracrvene i ultraljubičaste zrake
- Rad u temperaturnom opsegu: -40 °C do +60°C
- Mogu da se slažu u više nivoa
- Mogu da se recikliraju bez ograničenja

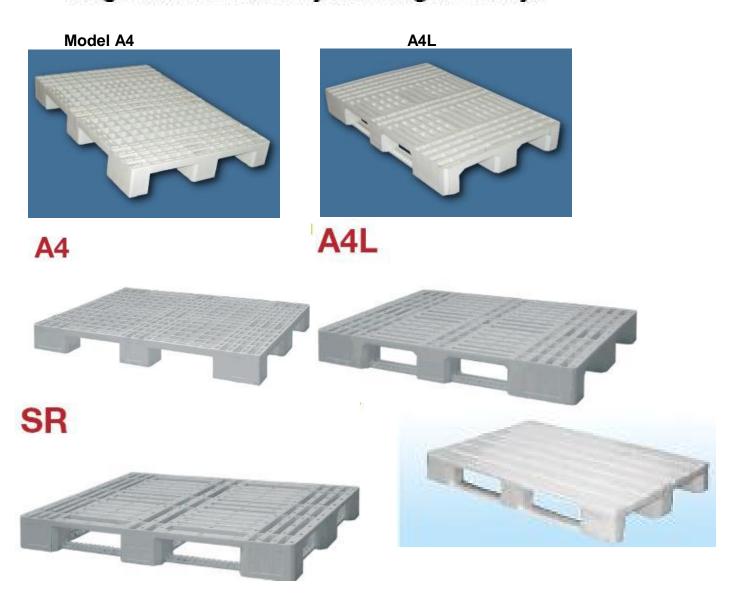









Model	Visina	Dužina	Širina	Nosivost	Ukupna	Masa	Rastojanja	
	(mm)	(mm)	(mm)	na viljuškaru (kg)	nosivast (kg)	(kg±3%)	(mm)	
A4	130	1200	800	600	1800	7.1	A=600 B=230 C=590 D=295	
A4L	140	1020	720	1500	4000	8.6	A=620 B=230 C=590 C=220	
	140	1000	800	1500	4000	9,3	A=620 B=230 C=590 D=210	
	140	1100	800	1500	4000	10	A=770 B=300 C=620 D=230	
	140	1420	1120	1500	4000	18	A=655 B=250 C=610 D=230	
	140	1200	800	1500	4000	12	A=655 B=250 C=610 D=230	
	140	1130	830	1500	4000	10	A=770 B=300 C=620 D=230	
	140	1200	1000	1500	4000	15	A=650 B=250 C=600 D=225	
SR	140	1200	800	1500	4000	11	A=655 B=250 C=610 D=230	
	140	1200	1000	1500	4000	14,5	A=810 B=315 C=600 D=225	
SRT	140	1200	940	1500	4000	13,3	A=800 B=310 C=610 D=225	
	140	1200	960	1500	4000	13,8	A=800 B=310 C=610 D=225	
	140	1200	1000	1500	4000	14,3	A=800 B=310 C=610 D=225	
	140	1280	1080	1500	4000	15,5	A=810 B=315 C=610 D=225	
	140	1300	1100	1500	4000	17,1	A=810 B=315 C=610 D=225	
					družívo za proizvodnju, promet i usluge			
					REPROAS d.o.o.			
				AS	Čačak, Ulica 421 br.7a			
				ALDO	*: 062 211 210 * 062 476 163 * 8 : 032 - 343-013			